

# Door Accessories & Winching Options



## NEW Lock Drives

Lock Drives winching components and accessories are now available! Ensure your doors are tight and operate efficiently for years with our five-year warranty.

### Lock Drive Accessories



Water Pipes    Couplings    Pipe Brackets



## NEW Rope Cutter

Cut and seal your cord at the same time within seconds with our rope cutting box. Heats fast and will save you time.



## NEW Cord

Low stretch polyester cord available in 1/8" or 3/16" diameter. Smooth, durable, and mildew resistant. Great for winching and a multitude of other uses.



Heavy duty **steel split bolt** makes door adjustment a snap.



Sturdy 2-piece **galvanized steel handle** gives extra strength for maximum seal.



**Eye Bolt** option gives the grower built inadjustability with the same sturdy two piece galvanized steel handle.



The **Ratchet Cord Adjuster** option is the quickest and easiest option to maintain cord tension, and secure a tight seal for the system.

- ✓ Quickest and easiest method to maintain cord tension
- ✓ Secures tight seal for tunnel door system
- ✓ Easy to install on existing systems for retrofits
- ✓ Galvanized steel construction for added durability
- ✓ Available for new doors and store retail options

### Innovative Climate Solutions

411 Mason Street, Onalaska, WI 54650  
800 345 7200 (toll free) or 608 783 5691  
608 783 6115 (fax)  
info@lbwhite.com | www.lbwhite.com

### Your L.B. White Dealer:

© 2023 L.B. White Company  
All rights reserved.  
All specifications are subject to change without notice.

# POULTRY DOOR OPTIONS

For all phases of poultry production



Products within brochure are subject to the following warning for CA residents:



## 1"/R-8+ Value Tunnel Doors

We offer a large selection of high quality poultry facility tunnel doors for evaporative cooling systems. These doors are constructed with a durable, heavy duty fiberglass shell and lightweight injected Ecofoam\* core, are corrosion resistant to withstand harsh litter treatments and have an R-Value 8+.

**1 5/8" door with R-11 Value also available for colder climates.**



Standard heavy duty extruded aluminum hinge with stainless steel pin and wide leaf at bottom to prevent wood from splitting during installation.

The connecting rail is built into the aluminum cap. No aggravating H channels or extra parts to order!




## Fan and Window Covers

The L.B. White 1" Fan and Window covers offer superior R-Value and are available in a wide range of sizes to fit most openings.

- ✓ Available in custom sizes
- ✓ R-Value of 8+.
- ✓ Heavy duty aluminum hinges with stainless steel rods.



**Insulated Sidewall Inlet with Air Deflector**

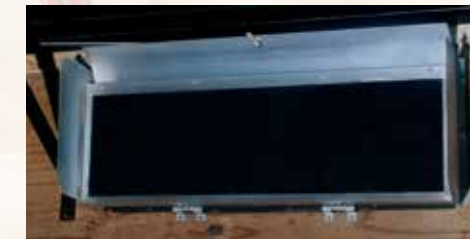

**Small Galvanized Inlet**



**Large Galvanized Inlet with Side Flaps**



Heavy duty fiberglass shell and lightweight injected foam core with R-Value 8+ insulation prevents condensation.

Fold out flap for winch connection. Equipped with door lock latches to keep doors closed.

Sidewall doors with side deflectors to help direct air toward ceiling.

### EcoFoam®

L.B. White Tunnel Doors exclusively use Ecofoam® insulation, which is the benchmark in environmental compliance and responsibility. Ecofoam® is the most robust rigid foam system on the market today, with unmatched performance proven superior in side-by-side comparisons to other systems. Ecofoam® also has no global warming potential (GWP), has no ozone depletion potential (ODP), and is VOC-exempt.

### Environmentally Responsible

- ✓ Zero Global Warming
- ✓ Zero Ozone Depletion
- ✓ VOC Exempt
- ✓ EPA / SNAP Compliant
- ✓ Marine Safe Ingredients
- ✓ Formaldehyde Free
- ✓ Urea-Formaldehyde Free
- ✓ Penta-BDE Free
- ✓ Asbestos Free
- ✓ Montreal Protocol Compliant
- ✓ Kyoto Protocol Compliant
- ✓ Kigali Amendment Compliant



OUR COMMITMENT TO SUSTAINABILITY



## Bi-Fold Doors

L.B. White offers the highest quality B-Fold Doors available, for poultry houses, dairy barns, and multiple other applications. Our counter weight system equals one of the easiest operating bi-fold doors on the market.

- ✓ Fully insulated 1 5/8" laminated panels
- ✓ .045-.050 fiberglass interior/exterior skin with 1 1/2" 2# density EPS insulation
- ✓ .090/.125" extruded aluminum frame channel has 6005 alloy with T6 Temper for additional strength
- ✓ Top and center .090 aluminum continuous hinge with 3/16" stainless steel pin.
- ✓ Standard door ships with open safety bar, EPDM double bulb seal, all necessary hardware, and installation instructions.



## Walk-in Doors

- ✓ R-Value of 8+.
- ✓ Sizes range from 20" x 60" to 48" x 72".
- ✓ Doors can be ordered with standard or heavy duty frames. Frames are also available with a handicap accessible threshold.

